

m o o o i<sup>®</sup>



## Heracleum the Big O

---

by Bertjan Pot

The Heracleum lamp by Bertjan Pot & Marcel Wanders is a force of nature! Just like the plant that inspired it, the lamp is expanding, transforming and growing new leaves to crown this exciting new design season.

---

<b>Designer</b>	Bertjan Pot
<b>Year of design</b>	2012
<b>Material</b>	Metal wire frame, poly carbonate lenses ultra thin suspension wire.

---

m o o o i<sup>®</sup>

**Additional**

Now also available in USA, MEX & CA . Designed by Bertjan Pot Powered Through Electrosandwich By Marcel Wanders

---

## detailing



The Heracleum leaves are not frozen in one position. They can be freely re-positioned by rotating them around their stem.

New: Heracleum includes a new LED that allows endless technical possibilities, making this new version much more efficient while providing unique and sparkling illumination.

---

## colours



Nickel



Copper

---

## technical general

### amount of LED's:

324

### colour temperature (degrees Kelvin, K) Colour rendering index:

2700K (warm white, comparable to incandescent) CRI\_Ra 81, colour rendering group IB

### luminous flux (Lumen, lm)

2600 lm

### 6 suspension points

Please refer to the manual for position of the suspension points. This is supplied with the product or you can ask your closest sales representative.

### 2 power supplies included

### Power consumption MAX 72W

Cable length 4M | 13.1ft (transparent) can be shortened down to 30cm | 11.8".

---

## technical (CE)



Dimmable with mains voltage dimmer (dimmer for incandescent, halogen)

Please make sure to use a dimmer rated for a low power luminaire.

Input voltage of 220-240V ~50Hz AC

Voltage on lamp < 5V DC (actual lamp surface functions as conductor!)



Steel canopy, cable length 4M (transparent)

Power supply included in canopy.

Professional installation recommended.

---

## Recommended dimmers (ce)

Dimmers below (make & type) have proven to show a fluent dimming behaviour with *CE version*:

GIRA 226200 (replaces 030600) R,L

JUNG 244HEX20-500 R,L

INSTA 51180 R,L

PEHA 435 HAN R,L

Cooper control iLight system source controllers: SCI0410, SCI0805, SCI1210, SCI1220

Lutron LQSA-4A-D & QSNE-4A-D

**IMPORTANT!** The use of a non-recommended dimmer can lead to unexpected dimming behavior and even non-repairable damage of the fixture and/or driver.

# m o o o i<sup>®</sup>

---

## technical (cULus)



Dimmable with mains voltage dimmer (dimmer for incandescent, halogen)  
Please make sure to use a dimmer rated for a low power luminaire.

Input voltage of 110-127V~60Hz AC

Voltage on lamp < 5V DC (actual lamp surface functions as conductor!)



Steel canopy, cable length 4M | 13.1 ft (transparent)  
Power supply included in canopy.

Professional installation recommended.

### recommended dimmers

Dimmers below (make & type) have proven to show a fluent dimming behaviour with *cULus* version:

Lutron CT-603PGH-WH

Lutron DIVA DV-603PG

Lutron DV-600P

Lutron CTCL-153 PD

Lutron LQSA-4A-D & QSNE-4A-D

IMPORTANT! The use of a non-recommended dimmer can lead to unexpected dimming behavior and even non-repairable damage of the fixture and/or driver.

---

## packaging

H 238,5 cm | 93,9"

W 115 cm | 45,3"

D 107 cm | 42,1"

Colli 1/1

Product weight:

10,5 KG | 23,1 lb


With packaging:

30 KG | 66,1 lb


## cleaning instructions

Can be effectively cleaned using a regular household dust cloth or feather duster. Lightly dust inbetween each component when the lamps are not in use. Moooi recommends always reading the label of any cleaning products you wish to use on or near any item from the Moooi collection. For further information on how to clean this product please contact your nearest Moooi agent or dealer which can be located through our website.

## dimensions

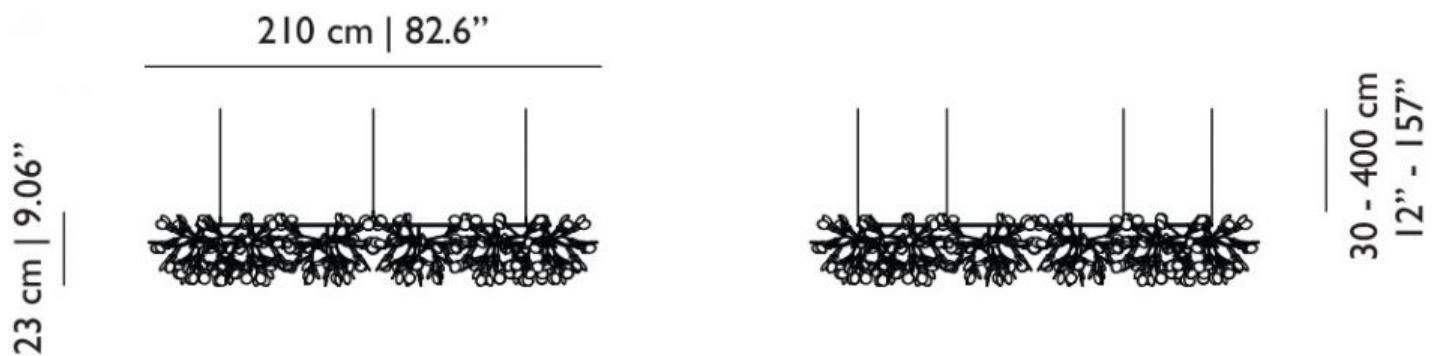

cULus canopy



CE canopy

